

(51) International Patent Classification<sup>5</sup>:

H04N 5/44

A1

(11) International Publication Number:

WO 96/06501

(43) International Publication Date:

29 February 1996 (29.02.96)

(21) International Application Number: PCT/US94/09656

(22) International Filing Date: 24 August 1994 (24.08.94)

(71)(72) Applicants and Inventors: KWOH, Daniel, S. [US/US];  
3975 Hampstead Road, La Canada/Flintridge, CA 91011  
(US). MANKOVITZ, Roy, J. [US/US]; 18057 Medley  
Drive, Encino, CA 91316 (US).


(74) Agent: HARTZ, Edwin, L.; Christie, Parker & Hale, P.O. Box  
7068, Pasadena, CA 91109-7068 (US).

(81) Designated States: AM, AT, AT (Utility model), AU, BB, BG,  
BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE  
(Utility model), DK, DK (Utility model), ES, FI, FI (Utility  
model), GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT,  
LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO,  
RU, SD, SE, SI, SK, SK (Utility model), TJ, TT, UA, US,  
UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,  
BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG),  
ARIPO patent (KE, MW, SD).

Published

With international search report.

(54) Title: APPARATUS AND METHOD FOR TOTAL PARENTAL CONTROL OF TELEVISION USE

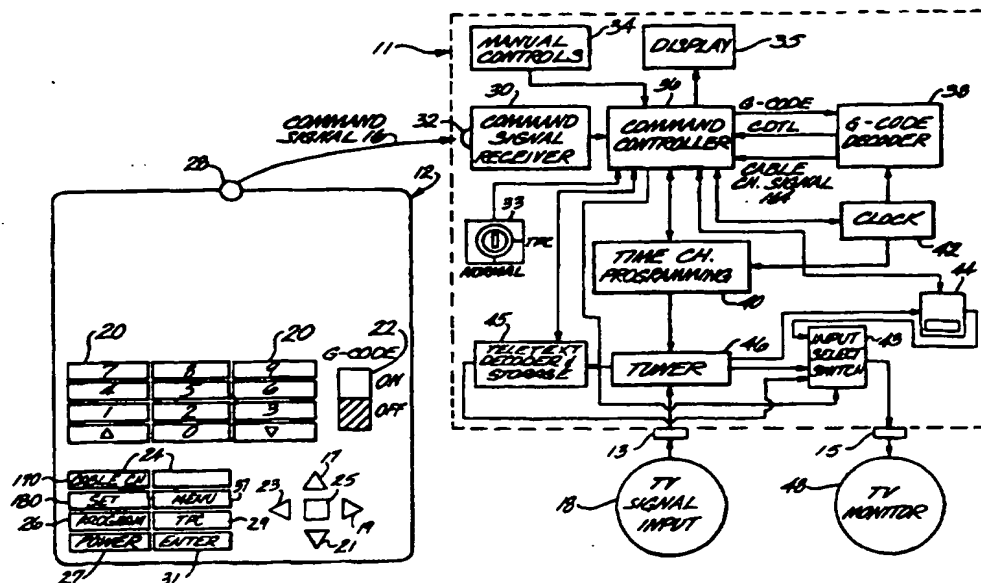

## (57) Abstract

An apparatus for parental control of television use by excluding or including selected programs, channels, and/or times. The apparatus includes a command controller (36) comprising a microprocessor (50), a read only memory (52), a memory for authorized identification numbers (54), and a memory for storing the selected programs, channels, dates and times (54); a keyboard (20, 22, 24, 26, 27) or similar apparatus for use in entering an identification code into the controller; a clock (42) with an output as a function of time located in the television receiver; means (40, 36) for ordering each program, date, and time into temporal order; and, means (54) for storing the selected program, date, and time in temporal order.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Larvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

1

5

10

**APPARATUS AND METHOD FOR  
TOTAL PARENTAL CONTROL OF TELEVISION USE**

**Background of the Invention:**

This is a continuation of pending Patent Application Serial No.  
08/100,616 filed July 29, 1993.

**Field of the Invention:**

This invention relates generally to the controlled use of television receivers and particularly to parental control of the use of television receivers.

20

**Prior Art:**

Parental control is presently available in some television receivers, video cassette recorders, and cable boxes on a limited basis. In these devices, certain channels may be locked out. However, the locking out of channels does not prevent children from spending excessive time watching television instead of studying or doing other things. Other devices limit the amount of time, but do not provide for selective viewing to prevent viewing of undesirable programs. One example of parental control at the television receiver is disclosed in U.S. Patent 4,510,623 to Bonnian et al. A local oscillator for electronically tuning the television is controlled by a phase lock loop which is responsive to the output signal from a microprocessor. The microprocessor provides the output signal only if the selected channel has not been inhibited. To inhibit a channel for a period of time, the user enters a lockout code which is stored in a non-volatile memory. The memory provides one input to the microprocessor which is compared to the input by a user selecting a channel to be viewed. The microprocessor determines whether the selected channel is one of the inhibited

1 channels and, if it is, does not generate the necessary signal for tuning to that  
channel.

Another prior art patent that discloses the blocking out of selected  
channels is U.S. Patent No. 4,718,107 to John J. Hayes. The parental control  
5 disclosed in the Hayes patent is provided in a converter box. In this system, if  
the access code is forgotten, the converter box has to be taken to the business  
office of the CATV system to have the memory purged of the blocked-out  
channel information and the access code, and a new access code must be  
entered.

10 In general, the present state of the art concerning parental control suffers  
from a number of drawbacks. In particular, the control is very limited and does  
not provide a parent the broad control desirable for controlling the viewing or use  
of a television by a child.

15

20

25

30

35

1        **Summary of the Invention:**

5            A principal feature of the invention concerning parental control is providing an improved system for the selection and entering of programs, channels, dates and times either to be included for viewing or excluded from  
10        viewing or controlling the use of a television receiver. In a mode of inclusion, the programs to be added may be added by using the compressed code published in newspapers or that appear on the TV schedule carried by a floppy disk or downloaded from information transmitted from a central location over a telephonic line. Compressed codes and the use thereof are disclosed in U.S.  
15        Patent Application Serial No. 07/829,412 filed February 3, 1992, which is incorporated herein by this reference as though set forth in full. This may also be done for exclusion from availability for viewing. The compressed code has been called G-code and PlusCode in association with Gemstar Development Corporation equipment, and G-code and PlusCode are trademarks of Gemstar.

20            Alternatively, the G-code compressed codes that are now common in newspapers may appear in a TV schedule that is broadcast with the TV signal in the video blanking interval or from an FM broadcast of the TV schedule which is, upon receipt, decoded and stored for display when requested. When displayed, programs to be included may be selected by a cursor, or alternatively  
25        by the compressed code. Similarly, programs that had previously been selected may be removed or deleted by entering the compressed code or by using the cursor. Channels, days or dates and time may be included under the parental control mode of the system. Selected channels may be made available at any time, or may be made selectively available during designated periods of time  
30        programmed into the system. Certain days, such as Saturday and Sunday, may be permitted days of viewing or using the television, and these days may be programmed into the system under the parental control mode.

35            The present invention also includes the use of a remote controller that provides for downloading of information sent over telephone lines. The information sent over the telephone lines may include categories of TV programs such as children's programs, sports programs, news and so forth. The user may call a number such as a 900 number and request that the TV programs available in certain periods of time be categorized in selected categories, such as children's programs for example. A compressed code representing the selected categories is then sent over the telephone lines and downloaded into the controller or other apparatus so that categories of programs may be selected for inclusion or exclusion in the parental control mode. To include categories or exclude them,

1 the compressed code is entered in the system by use of the keypad on either the remote controller or the television or auxiliary equipment, such as a VCR, cable box or satellite box.

5 Additionally, the codes for categories and subcategories of programs; such as movies - children, may be published in newspapers and magazines, broadcasted as part of a TV guide, which may be a video program or in the VBI, or the codes may be recorded on a floppy disk or a video cassette as part of a TV guide.

10

15

20

25

30

35

**Brief Description of the Drawings:**

FIG 1 is a schematic showing apparatus according to this invention with the parental control circuitry with a compressed code decoder means embedded in a video cassette recorder.

FIG 2 is a schematic showing apparatus according to this invention with the parental control circuitry with a compressed code decoder means embedded in a television receiver.

FIG 3 is a schematic of the embedded processors and memory for parental control and compressed code decoding.

FIG 4 is a schematic showing the compressed code decoder means embedded in a remote controller.

FIG 5 is a flow-chart of the operation of the apparatus incorporating the parental control in accordance with this invention.

FIGs 6 - 10 illustrate the different displays on the screen of the TV or the display of the VCR or remote controller employing the present invention.

FIG 11 is a flow graph of the G-code compressed code decoding technique.

FIG 12 is a perspective view of an alternative remote controller that includes downloading capabilities for compressed codes.

FIG 13 is a bottom view of the apparatus of FIG 12 showing a microphone hole and two electrical contact holes.

FIG 14 shows the controller of FIG 12 being used in conjunction with a telephone.

FIG 15 is a block diagram of the components within the controller of FIG 12.

FIG 16 is a block diagram of alternative components for the controller of FIG 12.

FIG 17 is a schematic showing apparatus according to this invention with a television receiver having a parental control input terminal and control.

1        **Description of the Preferred Embodiment:**

Referring now to the drawings, there is shown in FIG 1 a Video Cassette Recorder/Playback Unit (VCR) 11 including circuitry for providing parental control of the use of a television receiver. The circuitry is shown embedded in the VCR, however, the circuitry may be embedded in the television receiver, as shown in FIG 2, or in some other control device such as a cable box or a satellite box. When embedded in a VCR, the circuitry is located between a television signal input 18 and a television monitor 48. The source of the television signal may be any one of the typical sources, such as, for example, an antenna, a video game player, a cable converter box, or a satellite converter box.

As part of the parental control, the VCR 11 is connected to the television signal input 18 by way of a tamper-proof connector 13 and to the television monitor 48 through a tamper-proof connector 15. When the parental control circuitry is embedded in the television receiver, as shown in FIG 2, the tamper-proof connectors are not needed, but may be included to prevent another source from being connected to the TV. The parental control circuitry may be controlled at the apparatus by use of manual controls 34 or from a remote controller 12.

The primary components of the parental control circuitry include a command controller 36 and an input selection switch 43 (FIG 1) or input selection switch 57 (FIG 2). The parental control circuitry permits the parent to select either by inclusion or exclusion the particular source and/or programs, channels, dates and times available for television viewing. In this way, the parent can control the content of programs watched and/or the amount of time that a child may spend watching or playing games on television rather than studying, for example. The parental control circuitry may further advantageously include a compressed code decoder 38 so that the G-code compressed code that presently appears in television calendars may be used to enter the selected program, rather than using the more laborious and time consuming approach of inputting the channel, date, time, and length of the program that is selected by the parent for inclusion or exclusion.

In a preferred embodiment, the parental control circuitry is shared by the G-code decoder circuitry, which is disclosed and described in detail in U.S. Patent Application Serial No. 07/829,412.

To provide for remote control of the VCR 11, there is included in the VCR a command signal receiver 30 with a photodiode 32 which senses the command signal 16 sent from the remote controller 12 by way of an infrared light emitting diode 28 on the remote controller 12. The manual controls 34 of the VCR 11



1 include the input keys of the remote controller 12 and the operation of the VCR  
11 will, thus, be described by use of the remote controller 12. Similarly, the  
television illustrated in FIG 2 will have the input keys as shown on the remote  
controller 12 in its manual controls 34. Also, the television of FIG 2 may be  
5 remotely controlled, and for this purpose includes the command signal receiver  
30 and photodiode 32.

The remote controller 12 has a number of keys, which include numerical  
keys 20, G-code switch 22, function keys 24, program key 26, and power key  
27. The remote controller 12 also includes a total parental control key 29 and  
10 an enter key 31. The remote controller may further advantageously include a  
cursor control having up/down keys 17 and 21, respectively, right/left keys 19  
and 23, respectively, and an activate key 25. There are means in the remote  
controller 12 that interprets each key as it is pressed, and sends the proper  
command signal 16 to the video cassette recorder 11 via the infrared diode 28.  
15 Except for the G-code switch 22, the total parental control key 29, menu key 37,  
enter key 31 and the up/down, right/left and activate keys 17, 19, 21, 23 and  
25 on the remote controller 12 in FIG 1, the remote controller is essentially the  
same as any other remote controller in function. It is to be noted that the typical  
keys of remote controllers, such as volume control and channel selection, are not  
20 shown on the controller of FIG 1, but would ordinarily be present.

The total parental control key 29 and enter key 31 are used when  
selecting programs, by title or channels, dates and time that are available for use  
of the television. The enter key 31 is used when entering the user's  
identification code that permits programming of the total parental circuitry to set  
25 up the program or channel, date, and time for a program to be available for  
viewing on the television receiver.

The G-code switch 22 is provided to allow the user to lock the remote  
controller 12 in the G-code mode while using a G-code, which is the name given  
to the compressed code which is the encoded CDTL information to perform easy  
30 selection of a program to be included or excluded under parental control or to be  
viewed by the user of the television, or to perform pre-programming for taping  
selected programs as disclosed in the 07/829,412 application.

A possible realization of the command controller 36 and the G-code  
decoder 38 is shown in FIG 3. The command controller 36 includes a  
35 microprocessor 50 for overall control and performing the parental control  
functions, a random access memory 52, a read only memory 54 for program  
storage, and input/output circuitry 56. This circuitry 56 is adapted to receive

1 commands from the command signal receiver 30, the manual controls 34, and  
the clock 42, and to output signals to a display 35, a time/channel programming  
circuit 40, and input selection switch 43. The random access memory 54  
5 includes a section for the parental control identification code and a section of  
stack memory for storing the program channels, dates, and times selected for  
viewing or, alternatively in the case of exclusion, the program channels, dates,  
and times that are selected for exclusion from viewing or when the TV receiver  
is not available for use. Either the ID codes section, or the stack memory may  
10 be separate from RAM 54. As noted above, the G-code numbering of the  
programs may be advantageously used to simplify the parental control operation  
of the television.

In order for the compressed code to be useful, it must be decoded, and  
apparatus for that purpose must be provided. A G-code compressed code  
decoder 38 is included in the VCR 11 of FIG 1 and the TV receiver of FIG 2. If  
15 the command controller 36 determines that a G-code has been received, then  
the G-code will be sent to the G-code decoder 38 for decoding. The G-code  
decoder 38 converts the G-code into channel, date, time and length (CDTL)  
information which is used by the command controller 36 to set the time/channel  
programming circuit 40 as set forth in the flow chart of FIG 11. Built into the  
20 VCR 11 is a clock 42. This is normally provided in a VCR and is used to keep  
track of the date and the time. The clock 42 is used primarily for timing the  
operation of the time/channel programming circuit 40 and the G-code decoder  
38. The time/channel programming circuit 40 receives the channel, date, time  
and length information from the command controller 36. When the proper date  
25 and time is read from clock 42, then the time/channel programming circuit 40  
and the command controller 36 cooperate to control the input to the TV monitor  
48. In the parental control operation, the input selection switch circuit 43 is  
selectively activated to permit an input from the TV signal input 18 or the  
record/playback unit 44 or to preclude either or both inputs.

30 The VCR 11 of FIG 1 and the TV receiver of FIG 2 advantageously include  
a key switch 33 for selecting either the total parental control mode of operation  
or the normal operation for the unit. For parental control, the key that operates  
the key switch 33 would need to be kept in a secure place.

The operation of the VCR 11 of FIG 1 and the TV of FIG 2, to provide  
35 parental control, may be better understood by reference to the flow chart set  
forth in FIG 5. The TV is turned on at step 300, and any other ancillary  
apparatus, such as VCR 11 in FIG 1, is also turned on. If the key lock 33 is in

1 the position for normal TV viewing, then the normal viewing of step 301 will be  
available. After completion of viewing, the TV is shut off (step 302). If the key  
lock 33 is in the total parental control position, then upon turning on the TV, the  
5 selections that are available by inclusion or not available by exclusion will be  
displayed on the screen as shown in step 303. A representative display of  
inclusion that would be present in step 303 is shown in FIG 6. The user of the  
apparatus may then select one of the programs that is available for viewing in  
step 304 and, upon completion of viewing, the TV is then shut off in step 305.  
10 If the available programs, channels, dates, and/or times are to be modified, then  
the total parental control key, such as key 29 in FIG 1, is pushed in step 307.

The pushing of the total parental control key 29 will cause a message to  
appear on the screen of the TV such as the one shown in FIG 7 wherein the user  
is requested to enter his or her identification (ID) code or number. Following the  
display of the message in step 308, the user enters his or her ID in step 309 by  
15 using the numbers of the key pad 20, for example, as shown in the remote  
controller of FIG 1. The authorized user ID codes will have been previously  
stored in the parental control ID section of the RAM 24, as illustrated in FIG 3.  
A typical user ID might be 6823 which, when entered, is compared in the verify  
step 310 under the control of the microprocessor 50 with the authorized parental  
20 control IDs stored in the RAM 54. The ID code number is entered by pressing  
keys numbered 6, 8, 2 and 3 and then the enter key 31. If the ID number that  
is entered is not an authorized number stored in RAM 54, then the user will be  
advised in step 311 by a message, such as the message of FIG 8, displayed on  
the TV screen that the ID number is incorrect and the inputting of another ID  
25 number will be requested. Steps 309 and 310 will, again, take place upon the  
entry of the new ID number and, if this ID number is again incorrect, the user will  
again be advised in step 311. Upon the entry of a number of incorrect ID  
numbers, such as 3, which are monitored in step 312, then the user will be  
advised in step 313 by a message such as the one shown in FIG 9 that the ID  
30 numbers that have been entered are not authorized ID numbers and that the TV  
will be disabled for a period of time. The period of time may, for example, be 30  
minutes or one hour or whatever may be selected during set up by the authorized  
user of the equipment.

If in the verification step 310 the user ID code that has been entered is  
35 an authorized ID, then in step 315 a menu will be displayed on the TV screen,  
such as shown in FIG 10. At the time during set up of entering the ID codes that  
will be the authorized ID codes, the user may also select whether the parental

1 control operation shall be one of inclusion or exclusion. Assuming that the  
selection of inclusion has been made, then the menu displayed in step 315 as  
shown in FIG 10 will be for inclusion of programs, channels, dates, and times  
that may be selected for viewing when in the total parental control mode. One  
5 or more of the possible selections set forth in the menu of FIG 10 may be  
selected in step 316. Instead of changing the programs, channels, date and time  
under the parental control, the authorized user may, at this point, override the  
parental control operation by pushing number 6 on, for example, the remote  
controller 12 of FIG 1, for normal TV viewing. This will cause the override of  
10 step 317 to permit normal TV viewing (step 318) after which the TV will be shut  
off in step 319 or the menu of FIG 10 may again be displayed in step 320 by  
pushing the MENU key 37 shown in FIG 1.

With the menu displayed on the screen of the television in step 315 or  
320, the user need only push one of the numbered keys on key pad 20 to set up  
15 the mode for selecting one of the possible selections as shown in the menu of  
FIG 10. The pushing of button 1 will permit the selection of programs as  
illustrated in FIG 5. Upon pushing button key 1, for example, (step 321), the  
previous selections that have been made will be displayed along with instructions  
for making deletions or additional selections.

20 If programs are to be deleted in step 322, the user activates the cursor  
by pressing button 25 (FIG 1), and then moves the cursor on the TV screen  
displaying the available programs, e.g., as shown in FIG 10, by use of the  
up/down keys 17 and 21 and the right/left keys 19 and 23 to the program that  
is to be deleted. With the cursor highlighting the program to be deleted, the  
25 enter key 31 is depressed to complete the deletion of the program from programs  
that may be viewed. In step 321, programs may, alternatively, be deleted by  
entering the compressed code, as shown in FIG 6. For example, if it is desired  
to delete the program FAMILY TIES, it is only necessary to enter on the keypad  
20 the numbers "1-5-6-5-7" and thereafter press the ENTER key 31. This will  
30 complete the deletion of FAMILY TIES from the programs available for viewing.

Similarly, to add one or more programs for viewing in step 323, the  
compressed code such as the G-code compressed codes that appear with the  
programs listed in the printed TV schedules may advantageously be employed.  
35 The user, on deciding which of the programs listed in the TV schedule to make  
available for viewing, enters the compressed code for each of these programs by  
using the keypad 20 on the apparatus or on the remote controller, as shown in

1 FIG 1, and the enter key 31. The TV schedule may also be made available on a  
floppy disk, as disclosed in U.S. Patent Application Serial No. 07/882,291 filed  
May 13, 1992 and incorporated herein by this reference as through set forth in  
5 full. A floppy disk drive may be incorporated into the controller, the VCR, or the  
television for reading the TV schedule and displaying same on the screen of the  
TV. If a floppy disk is used, then programs to be added may be selected by use  
of the cursor keys shown in FIG 1 or by entry of the G-code that is listed in the  
TV schedule retrieved from the floppy disk. Additionally, the TV schedule may  
10 be available as part of the TV broadcast signal in the vertical blanking interval of  
the TV signal or as the video program. When the vertical blanking interval is  
used to carry the TV scheduling information, it may be retrieved from the TV  
broadcast signal by a teletext decoder and storage 45 shown in FIGs 1, 2 and  
4 and selected by the input select switch 43 for display on the TV monitor 48.  
Again, the programs to be added may be selected by use of the cursor keys as  
15 shown in FIG 1, or by entry of the compressed code as described above.

The user may also select channels, dates, and times to be available for  
use of the TV by pushing buttons 2, 3 or 4 when the menu is being displayed on  
the TV screen in step 315. Channels, dates, and times may be deleted in the  
same manner as programs by using the cursor controls 17, 19, 21, 23, and 25,  
20 and the entry key 31 when the available channels, dates or times are displayed  
in steps 324, 327 or 330. It is possible to select a channel that is always  
available for viewing or to select a channel for viewing at selected times. To  
make a channel available for viewing at all times, it is only necessary to enter the  
channel number in step 326 when key 2 has been depressed in the selection step  
25 of 316. The period of time that a channel is available for use may be controlled  
by inserting starting and stopping times in step 326 when the channel number  
is inserted.

During the selecting process, each selection to be added is stored in  
temporary memory in RAM 54 and at the completion of the selection process  
30 transferred to the stack memory portions of RAM 54 for storage in temporal  
order. Upon the completion of each selection of program, channel, date, or time,  
the menu key 37 is depressed to return to step 315 for display of the menu  
shown in FIG 10. At any time in the selection process, the key 7 may be  
depressed while the menu is being displayed to compare the selections that have  
35 been made for possible inconsistencies, which is done in step 354. If there are  
no inconsistencies, then the microprocessor 50 causes the selections to be  
stored in step 356 in the stack memory portion of the RAM 54. If

1 inconsistencies do exist in step 354, then the program, channel, date, or time  
that is to be deleted to avoid the inconsistency is selected in step 355 by  
depressing the appropriate key 1, 2, 3, or 4 and going through the delete step  
322, 325, 328, or 331. Once there are no inconsistencies in the selections and  
5 the selections are stored in the stack memory portion of RAM 54, then the TV  
is shut off in step 357.

Another preferred embodiment of an apparatus for using compressed  
codes for parental control is the custom remote controller 1100 of FIGs 12 and  
13. This programmer, other programmers, and particularly universal remote  
10 control programmers, are disclosed in detail in U.S. Patent Application Serial No.  
08/000,934 filed January 5, 1993, which application is incorporated herein by  
this reference as though set forth in full. The custom remote 1100 has number  
keys 1102, which are numbered 0-9, a CANCEL key 1104, a REVIEW key 1106,  
a WEEKLY key 1108, a ONCE key 1110 and a DAILY (M-F) key 1112, and which  
15 are used to program the custom remote 1100. A lid normally covers other keys,  
which are used to set up the instant custom remote 1100. When lid 1114 is  
lifted, the following keys are revealed, but not shown in the drawings: SAVE  
key, ENTER key, CLOCK key, CH key, ADD TIME key, VCR key, CABLE key, and  
TEST key. Also included in the custom programmer 1100 shown in FIG 12 are:  
20 liquid crystal display 1134, red warning light emitting diode 1132 and IR diodes  
1134.

When using the instant remote 1100, the consumer initially performs a  
set-up sequence, consisting of selecting a protocol for the model/brand of VCR,  
setting the current real time, selecting a protocol for the model/brand of cable  
25 box, if used, and entering a series of channel number assignments. Although the  
instant remote 1100 makes selections of programs to be included or excluded  
and the recording of television programs extremely simple, the initial set-up  
sequence for the instant remote 1100 is more complex and deters the use of the  
instant remote by some consumers. For increased ease of use, custom remote  
30 1100 includes a microphone opening 1140 through which at least one  
microphone inside the custom programmer 1100 can receive electronically coded  
audio signals that contain the information necessary for the custom remote's  
initial set-up and commands to store this information into the custom remote  
1100.

35 In order to receive these audio signals, a user may call a special phone  
number which could be a toll-free 800 number, a pay-per-minute 900 number,  
or a standard telephone number with standard toll charges applying. The

1 consumer can speak to an operator who orally inquires from the consumer the  
information regarding the consumer's VCR model and brand, zip code, model and  
brand of cable box and the newspaper or other publication which the consumer  
will use to obtain the compressed codes. The compressed codes with the  
5 associated program in a television schedule format may be retrieved from disk,  
rather than the newspapers or other publication, as disclosed in U.S. Patent  
Application Serial No. 07/882,291 filed May 13, 1992, which is incorporated  
herein by this reference as though set forth in full. This is all the information  
needed to perform the initial set-up for the custom remote 1100. From the zip  
10 code information, the operator can determine to which cable system the  
consumer is connected and can combine this data with the knowledge of which  
publication or disk the consumer will use to select the correct local channel  
mapping table for the consumer.

The operator then directs the consumer to press a designated  
15 programming key which is, in the case of the preferred embodiment, the CH key  
located under lid 1114. When the CH key is pressed, the display 1134 will  
display the message "PHONE1 KEY2". Pressing the "2" numeric key places the  
custom remote into the manual local channel table programming mode that is  
implemented by instant remote 1100 when CH key under lid 1114 is pressed.  
20 Pressing the "1" numeric key initiates the remote programming mode. The  
remote programmer 1100 is then ready to receive an audio signal and display  
1134 displays the message "WAIT".

The operator will then direct the consumer to place the earpiece 1142 of  
the telephone receiver 1144 over the microphone opening 1140 of the custom  
25 remote 1100 as generally shown in FIG 14. The earpiece need not be placed  
directly against the custom remote 1100, but may be held more than an inch  
away from the microphone opening with generally satisfactory results. After a  
pause sufficient to allow the consumer to place the telephone receiver in the  
proper position, the operator will initiate the downloading of the initial set-up  
30 data and initial set-up programming commands transmitted over the telephone  
line 1146 using audio signals to the consumer's custom remote 1100.

If the initial set-up data is successfully transferred to the custom remote  
1100, the display 1134 of the custom remote 1100 will display the message  
"DONE". If the reception of the initial set-up data is not successful within a  
35 predetermined time limit, red warning light emitting diode 1132 will blink to  
inform the consumer to adjust he position of the telephone earpiece before  
another download of the information is attempted. After a waiting period

1       allowing this adjustment, the initial set-up data and commands are re-transmitted  
over the telephone line. If after a predetermined number of attempts to  
download the initial set-up information are unsuccessful, the liquid crystal display  
1134 displays the message "FAIL" and the operator is again connected to the  
5       consumer allowing the operator to speak to the consumer to provide additional  
assistance in the positioning of the telephone earpiece.

          Alternatively, a live operator could be provided by the local cable company  
and the initial set-up information downloaded to the custom remote 1100 by  
telephone line, through the existing cable of the cable system, or any other  
10       transmission means. If local cable companies supply the live operators, the only  
information they would need to gather from the consumer would be the VCR  
brand and model and the publication or disk containing compressed codes that  
the consumer plans on using, because the local cable company would know the  
model and brand of cable box installed at the consumer's location and the  
15       necessary data regarding the local channel designations for that cable system.

          FIGs 15 and 16 are schematics of the circuitry needed to implement  
alternative embodiments of the custom remote 1100. The circuit consists of  
microcomputer 1150, oscillator 1152, liquid crystal display 1154, keypad 1156,  
five way IR transmitters 1158 and red warning light emitting diode 1160. In  
20       both FIGs 15 and 16, earpiece 1142 generates serial audio signals which are  
received by microphone 1162.

          As shown in FIG 15, the audio signals received by microphone 1162 are  
passed through amplifier 1164 and forwarded through a DTMF decoder circuit  
1166 and into a serial port of microcomputer 1150. In the alternative circuit  
25       shown in FIG 16, the audio signals received by microphone 1162 are passed  
through amplifier 1164, through a high pass filter 1168 with a cutoff at  
approximately 1 - 5 kHz, and through a second amplifier 1170 to a serial port of  
microcomputer 1150.

          The control and/or data signals are sent to the associated apparatus such  
30       as VCR 11 of FIG 1 or the television of FIG 2 through one or more of the IR  
transmitters 1158.

          Alternatively, a dual microphone system (not shown) may be employed  
to increase reliability, especially when the custom remote 1100 is to be  
programmed in an environment with a high level of background noise that could  
35       interfere with the transmission of data through the single microphone acoustic  
means. In this system, one microphone would be placed near the telephone  
earpiece and the second microphone would be placed some distance away from



1 the earpiece in order to pick up background noise. An audio signal cancellation  
circuit is then used to effectively "subtract" the background noise picked up by  
the second microphone from the audio data signals combined with the  
background noise that is picked up from the first microphone, resulting in solely  
5 clean audio data signals. Preferably, the microphone and encoding assembly  
in FIG 16 is used as it is less expensive than the assembly in FIG 15 that uses  
a DTMF decoder 1166. The system shown in FIG 16 utilizes just two single  
frequency signals rather than many dual frequency signals as in a DTMF system.  
The first signal, a tone of approximately 3000 Hz, is used to signify a binary  
10 "one" and the second signal, a tone of approximately 500 Hz, is used to signify  
"zero". Since a 500 Hz signal is being used in this embodiment, the bandwidth  
of the 1000 - 5000 Hz high pass filter 1168 FIG 16 is designed to accommodate  
these frequencies.

15 If the exclusion mode has been selected by the user during the set up of  
the system then the selection steps shown in FIG 5 will result in programs,  
channels, dates and times that are excluded rather than included with the  
operation of the system being essentially the same for exclusion as for inclusion.

To further simplify the programming of the system, the TV programs are  
advantageously categorized and the categories given a compressed code or G  
20 Code compressed code for use in programming the apparatus. For example, a  
service may be accessed by use of the pay per use 900 number system and the  
compressed code numbers for selected categories of programs requested. For  
example, a user might call the 900 number and request the compressed code  
numbers for all Yankee baseball games in the coming week or for particular  
25 movies that include a particular actor or actress, such as John Wayne, and so  
forth. Also for parental control, the user might call the 900 number and request  
the compressed control numbers for all shows rated appropriate for a child of a  
certain age, then when a custom remote such as remote 1100 is used the  
compressed code for the requested categories of programs can be transferred  
30 over the telephone lines and downloaded into the memory of the system, such  
as the RAM 54 shown in FIG 3. Thereafter, as shown in FIG 5 the user in steps  
322 and 323 may use the compressed codes for the selected categories to either  
delete or add programs for inclusion or for exclusion. Any of the other  
programmers 300, 1200 and 1300 disclosed in U.S. Application Serial No.  
35 08/000934 may be used in downloading the compressed code for categories for  
parental control.

1 Parental control may also permit viewing of only those channels that do  
not require conversion by a cable box, such as the premium channels typically  
require, and to preclude the viewing of tapes. Such a system is shown in FIG  
17.

5 There are two possible inputs to the parental control TV 400 which are  
inputs 401 and 402. Input 401 is the normal input through a VCR 403 which  
permits normal viewing of all channels and use of the VCR for playing tapes.  
This normal viewing input may come directly from a cable box or a satellite box  
without the VCR. The second input 402 is the parental control input which  
10 precludes the use of the VCR for viewing tapes and/or the tuning by the cable  
box, or satellite box and returns the tuning to the TV 400.

VCR 403 and a cable box 404 are connected in series between the cable  
input and the input 401 to the TV 400. An input select switch 405, internal of  
the TV 400, selects either the regular input on terminal 401 or selects the  
15 parental control input on input 402. In the parental control connection, tamper-  
proof or locking connectors 406 and 407 are employed at the two ends of the  
coaxial cable to prevent tampering or the use of any source other than the cable  
source as shown in FIG 17.

A third locking connector 408 is employed at the input to the cable box  
20 as part of the means for preventing connection to a source other than the cable  
source. The locking connectors may be located at the T 410 rather than at the  
input to the cable box 404 and at the end of the co-ax cable 411.

The TV 400 may be controlled through a remote controller 420 or through  
manual controls located on the TV 400. When the TV is controlled from a  
25 remote controller 420, the controller may be coupled to the TV through an IR link  
or through cabling. When an IR link is used, there will be an IR emitter 421 in  
the controller 420 and an IR detector or receiver 422 in the TV 400.

The control signals for controlling the tuner 423, the input select switch  
405, and an on/off switch 424 in the TV 400 are sent from the remote controller  
30 420 to the TV receiver 400 through the IR link. The remote controller 420  
includes a command controller 36 that has a microprocessor and appropriate  
memories such as those shown in FIG 3. The controller also includes manual  
controls 34, such as those shown on the controller 12 of FIG 1.

The controller 420 provides control signals to control the input select  
35 switch so that the input to the TV 400 is either the regular channel input through  
the VCR and cable box or the input through the parental control coaxial cable  
411. Alternatively, the controller 420 may also include the circuitry of FIGs 1-4

1 for providing the ability to include or exclude selected channels, dates, times or  
programs, as described above in connection with those figures. For this purpose,  
the G-code decoder 38, clock 42 and time channel programming circuit 40 are  
included in the controller 420 and operates as described above.

5 The controller 420 may also include an IR emitter 430 for transmitting  
control signals from the controller 420 to the VCR 403 for controlling recording  
of selected programs by the VCR.

10 In operation the parent enters a designated code by use of the control 34  
on controller 420 or on the TV 400 to cause the command controller to send a  
control signal to the input select switch over the IR link. This control signal  
causes the switch to connect input 402, the parental control input, to the tuner  
423. Thereafter, the tuning is done at the TV either with or without further  
restrictions by previous limitations of inclusion or exclusion. Thereafter, the  
parent, enters another code to cause the switch 405 to connect input 401 to the  
15 tuner 423 for normal TV receiving.

While the invention as been described and preferred embodiments  
disclosed, it is anticipated that other modifications and adaptations will occur to  
those skilled in the art. It is intended, therefore, that the invention be limited  
only by the claims appended hereto.

1       **WHAT IS CLAIMED IS:**

1           1.       An apparatus for parental control of television use comprising a  
television receiver; parental control circuitry in the television receiver including  
a command controller comprising a microprocessor, a read only memory, a  
5       memory for authorized identification numbers, and a memory for storing the  
selected programs, channels, dates and times; means for entering an  
identification code into the controller; means for displaying the selected  
program, channel, date, and time on the screen of the television receiver; a  
10       clock with an output as a function of time located in the television receiver;  
means for ordering each program, date, and time into temporal order; and,  
means for storing the selected program, date, and time in temporal order.

15           2.       An apparatus in accordance with claim 1 further comprising means  
for comparing the selected program channel, date, and time to determine  
inconsistencies in the selection; means for displaying any inconsistencies; and,  
means for deleting inconsistencies.

20           3.       An apparatus in accordance with claim 1 further comprising means  
for comparing the stored program date or time that is earliest in time to the  
output of the clock for a pre-determined relationship; means for generating a  
television available signal upon the occurrence of the pre-determined relationship;  
means for channel selection; means for transmitting the channel information of  
the selected program or the selected channel to the channel selection means  
after the pre-determined relationship is found to exist.

25           4.       An apparatus in accordance with claim 3 further comprising means  
for measuring the length of time from the occurrence of the television available  
signal; and means for terminating the television available signal after a selected  
period of time as determined from the stored program date or time.

30           5.       An apparatus in accordance with claim 1 further comprising means  
for entering into said controller compressed codes, each having at least one digit  
and each representative of and compressed in length from the combination of  
channel, date, time, and length commands for a program; means for decoding  
35       each compressed code into channel, date, time, and length commands coupled  
to said television receiver.

1           6.    The apparatus of claim 1 wherein said means for entering  
comprises a television remote controller.

5           7.    The apparatus of claim 1 wherein said means for entering  
comprises manual controls attached to said television receiver.

8.    An apparatus in accordance with claim 3 further comprising means  
for deleting the earliest program, date, or time from the storage means upon the  
occurrence of the predetermined relationship.

10           9.    An apparatus in accordance with claim 3 wherein said means for  
channel selection comprises a cable box.

15           10.   An apparatus in accordance with claim 3 wherein said means for  
channel selection comprises a satellite receiver.

20           11.   The apparatus in accordance with claim 1 which further comprises  
means for substituting a local channel number for a channel number in said  
channel command.

25           12.   An apparatus in accordance with claim 1 wherein the  
authenticating means has a first and a second output, the first output being  
responsive to a correct user identification code to display a menu on the screen  
of the television to provide selection of program, channel, date, or time; and the  
second output being in response to an incorrect identification code and further  
including means responsive to the second output to disable the television  
receiver for a selected period of time upon the occurrence of a plurality of  
incorrect identification codes.

1           13.    A method of controlling the programs, channels, dates, and times  
that a television receiver is available for viewing comprising the steps of entering  
a user identification code; verifying that the entered code is an authorized code;  
5       displaying a menu from which programs, channels, dates, and times may be  
selected for inclusion in a list of programs, channels, dates, and times available  
for use of the TV receiver; selecting one or more of the programs, channels,  
10       dates, and times for establishing the program, channel, date, and time for which  
the television is available; entering the selected programs, channels, dates, and  
times in temporary storage; comparing the entered programs, channels, dates,  
and times for inconsistencies; removing any inconsistencies; and, storing the  
selected programs, channels, dates, and times for controlling the availability of  
the TV receiver.

15           14.    A method in accordance with claim 13 wherein the programs are  
selected by use of compressed codes, each having at least one digit and each  
representative of the combination of channel, date, time of day, and length  
commands for a program; decoding each compressed code to obtain channel,  
date, time of day, and length commands; storing each such channel, date, time  
of day, and length command in a the temporary storage.

20           15.    A method of controlling in accordance with claim 14 further  
comprising the steps of retrieving compressed codes for selected categories of  
programs and entering one or more of the category compressed codes for  
selecting categories of programs for viewing on the television receiver.

25           16.    An apparatus for parental control of television use comprising a  
television receiver having a controllable input select switch and two input  
terminals, a channel tunable device connected to the first input, a coaxial cable  
coupled to the second input and bypassing the channel tunable device, locking  
30       connectors at the two ends of the coaxial cable to prevent removal, a locking  
connector connected to the input of the channel tunable device, and means for  
controlling the input select switch in response to a user command.

35

1           17.    An apparatus for parental control of television use comprising a  
television receiver having two input terminals, a channel tunable device  
connected to the first terminal of the TV, a cable bypassing the channel tunable  
device connected to the second input terminal, a tuner internal of the television,  
5   means for selectively coupling one of the terminals to the tuner, and means for  
controlling the coupling means in response to a user input.


10

15

20

25

30

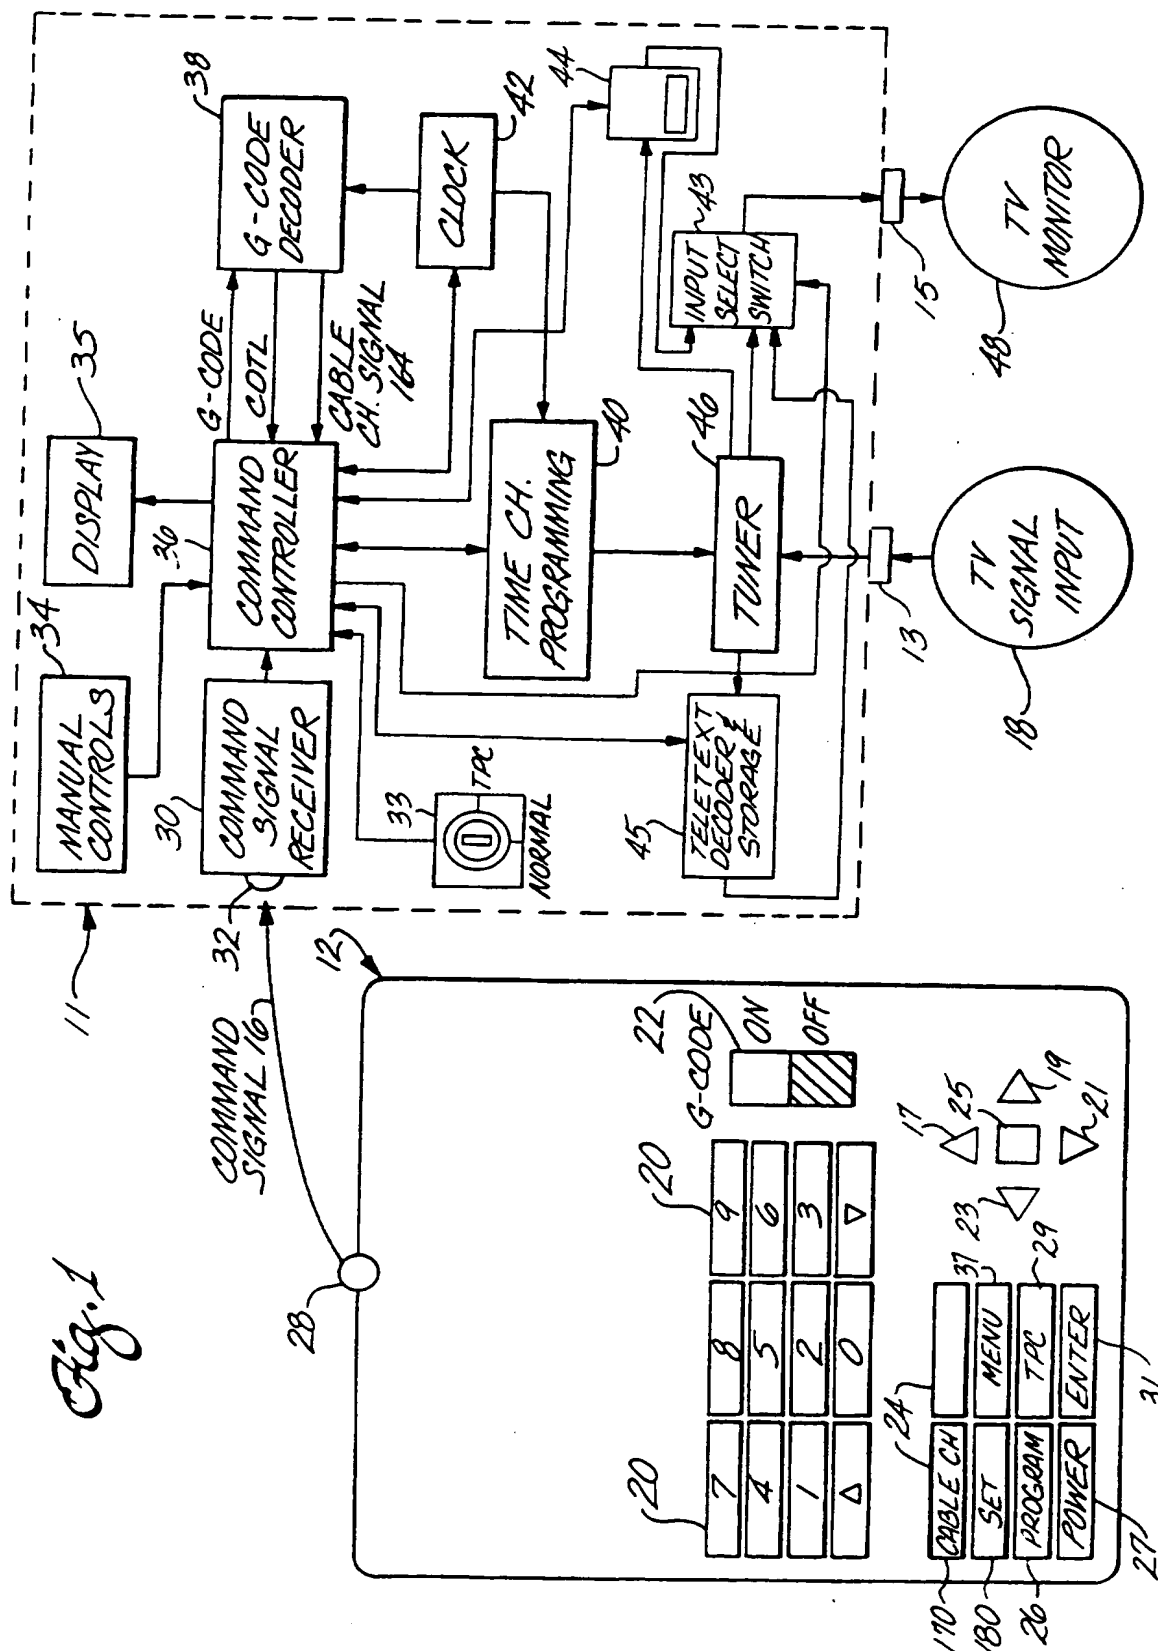





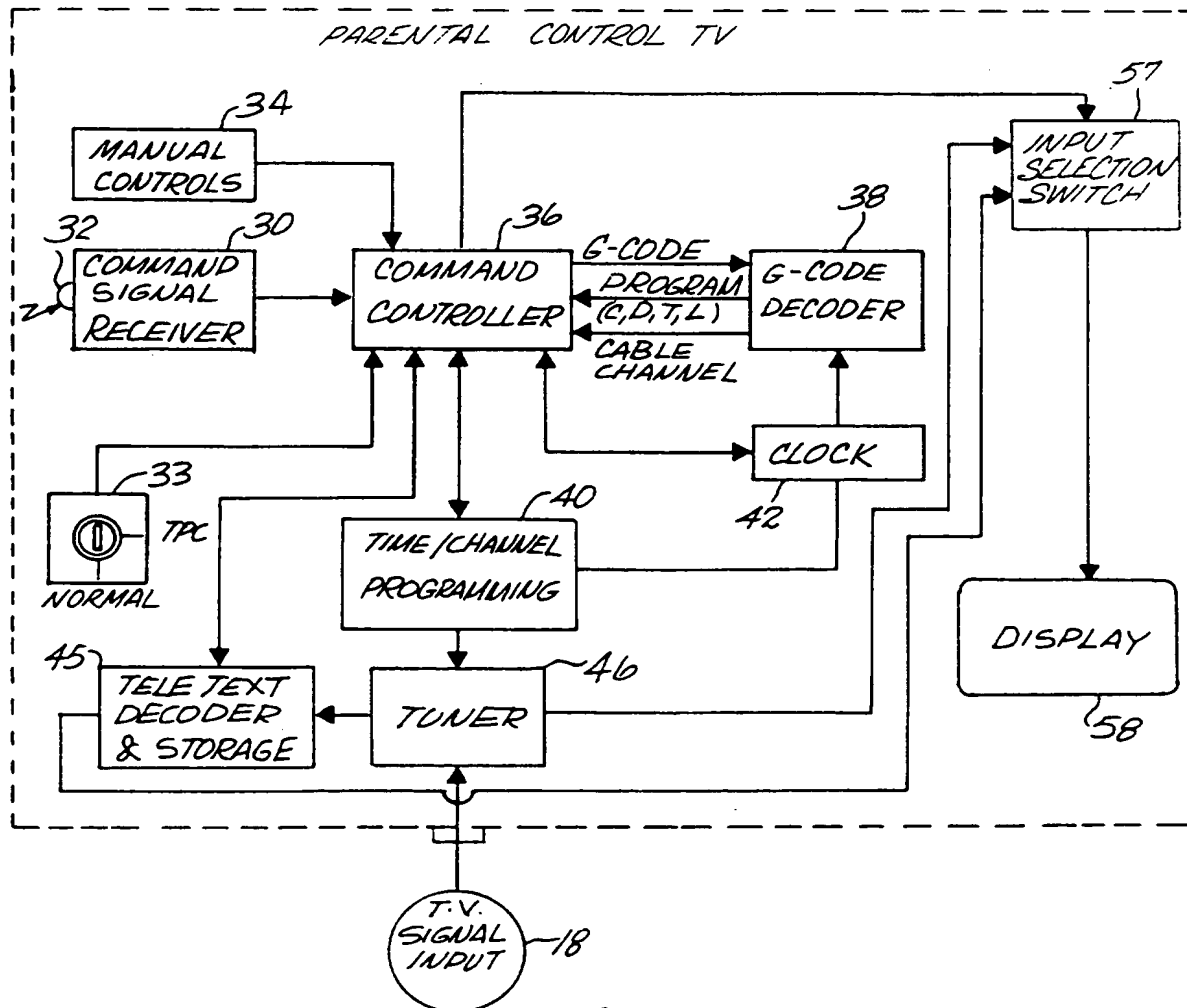


Fig. 2

Fig. 3

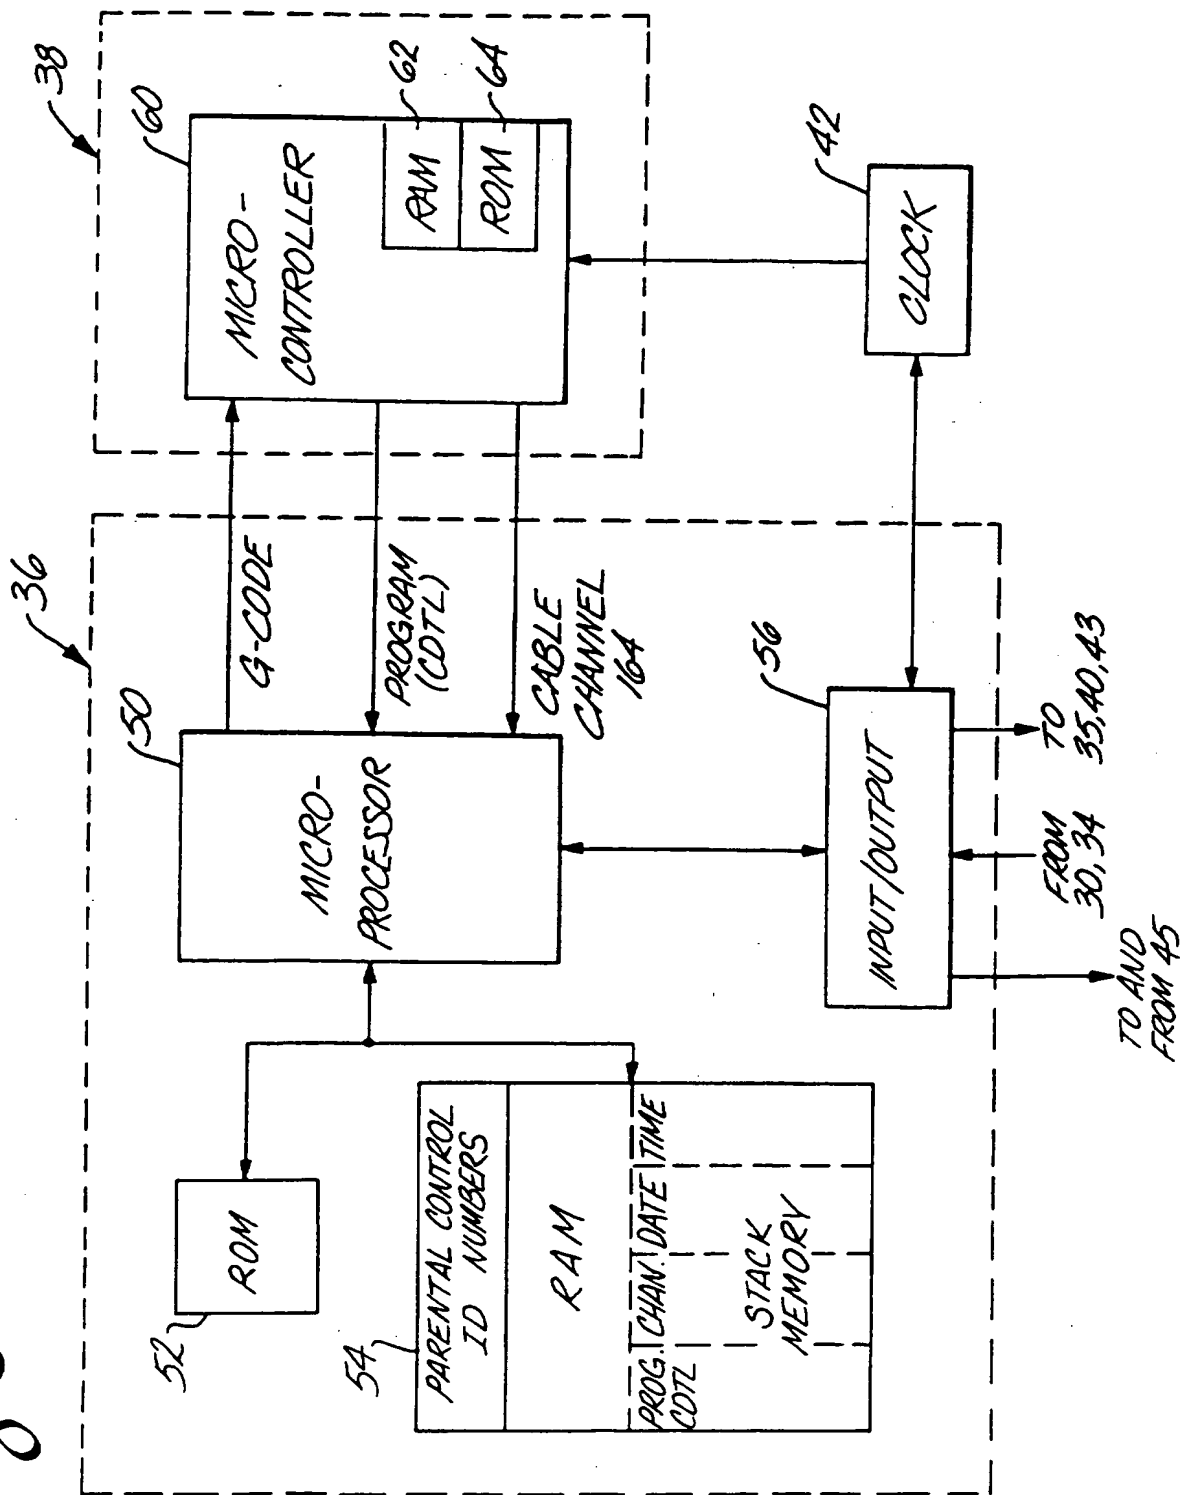

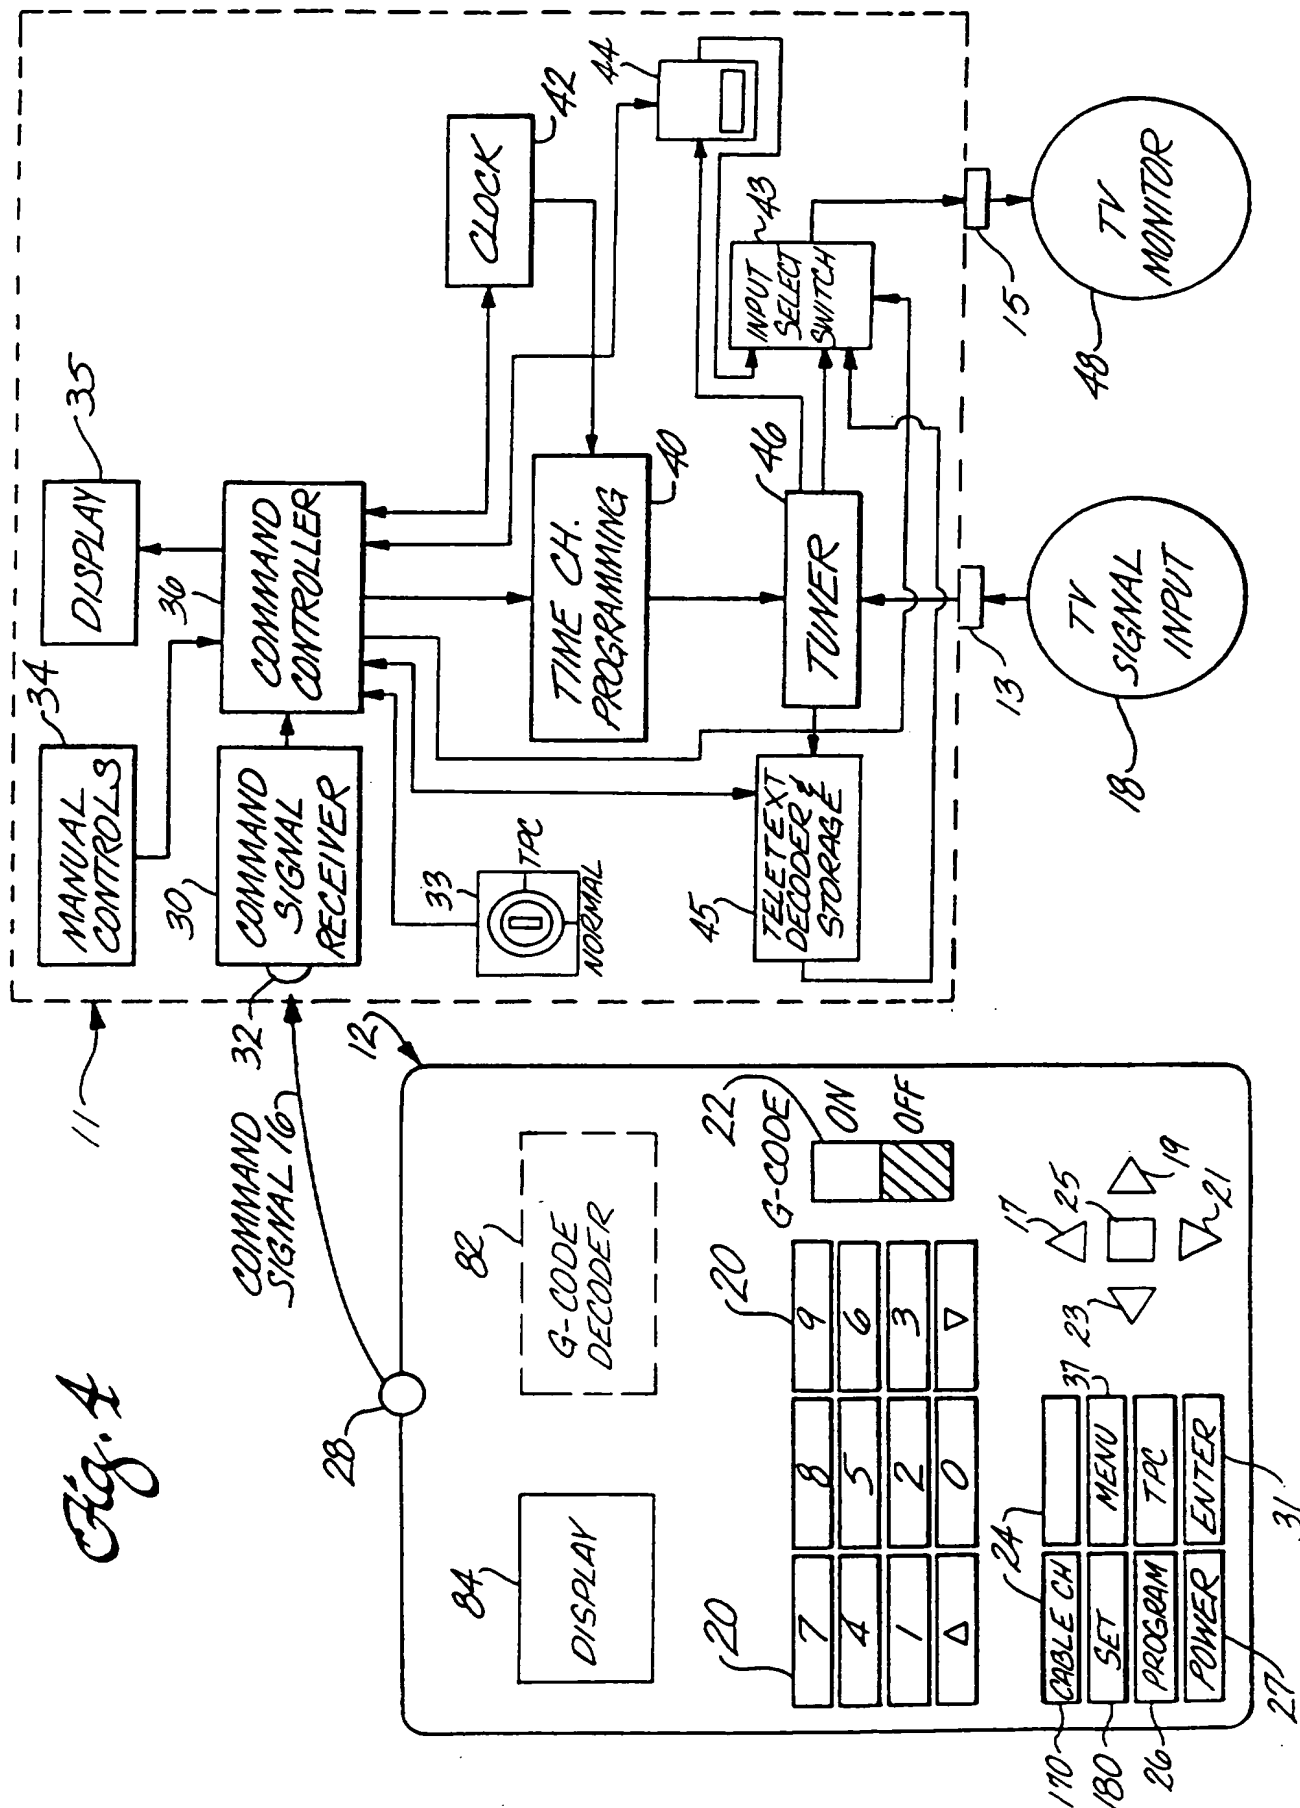

5/17

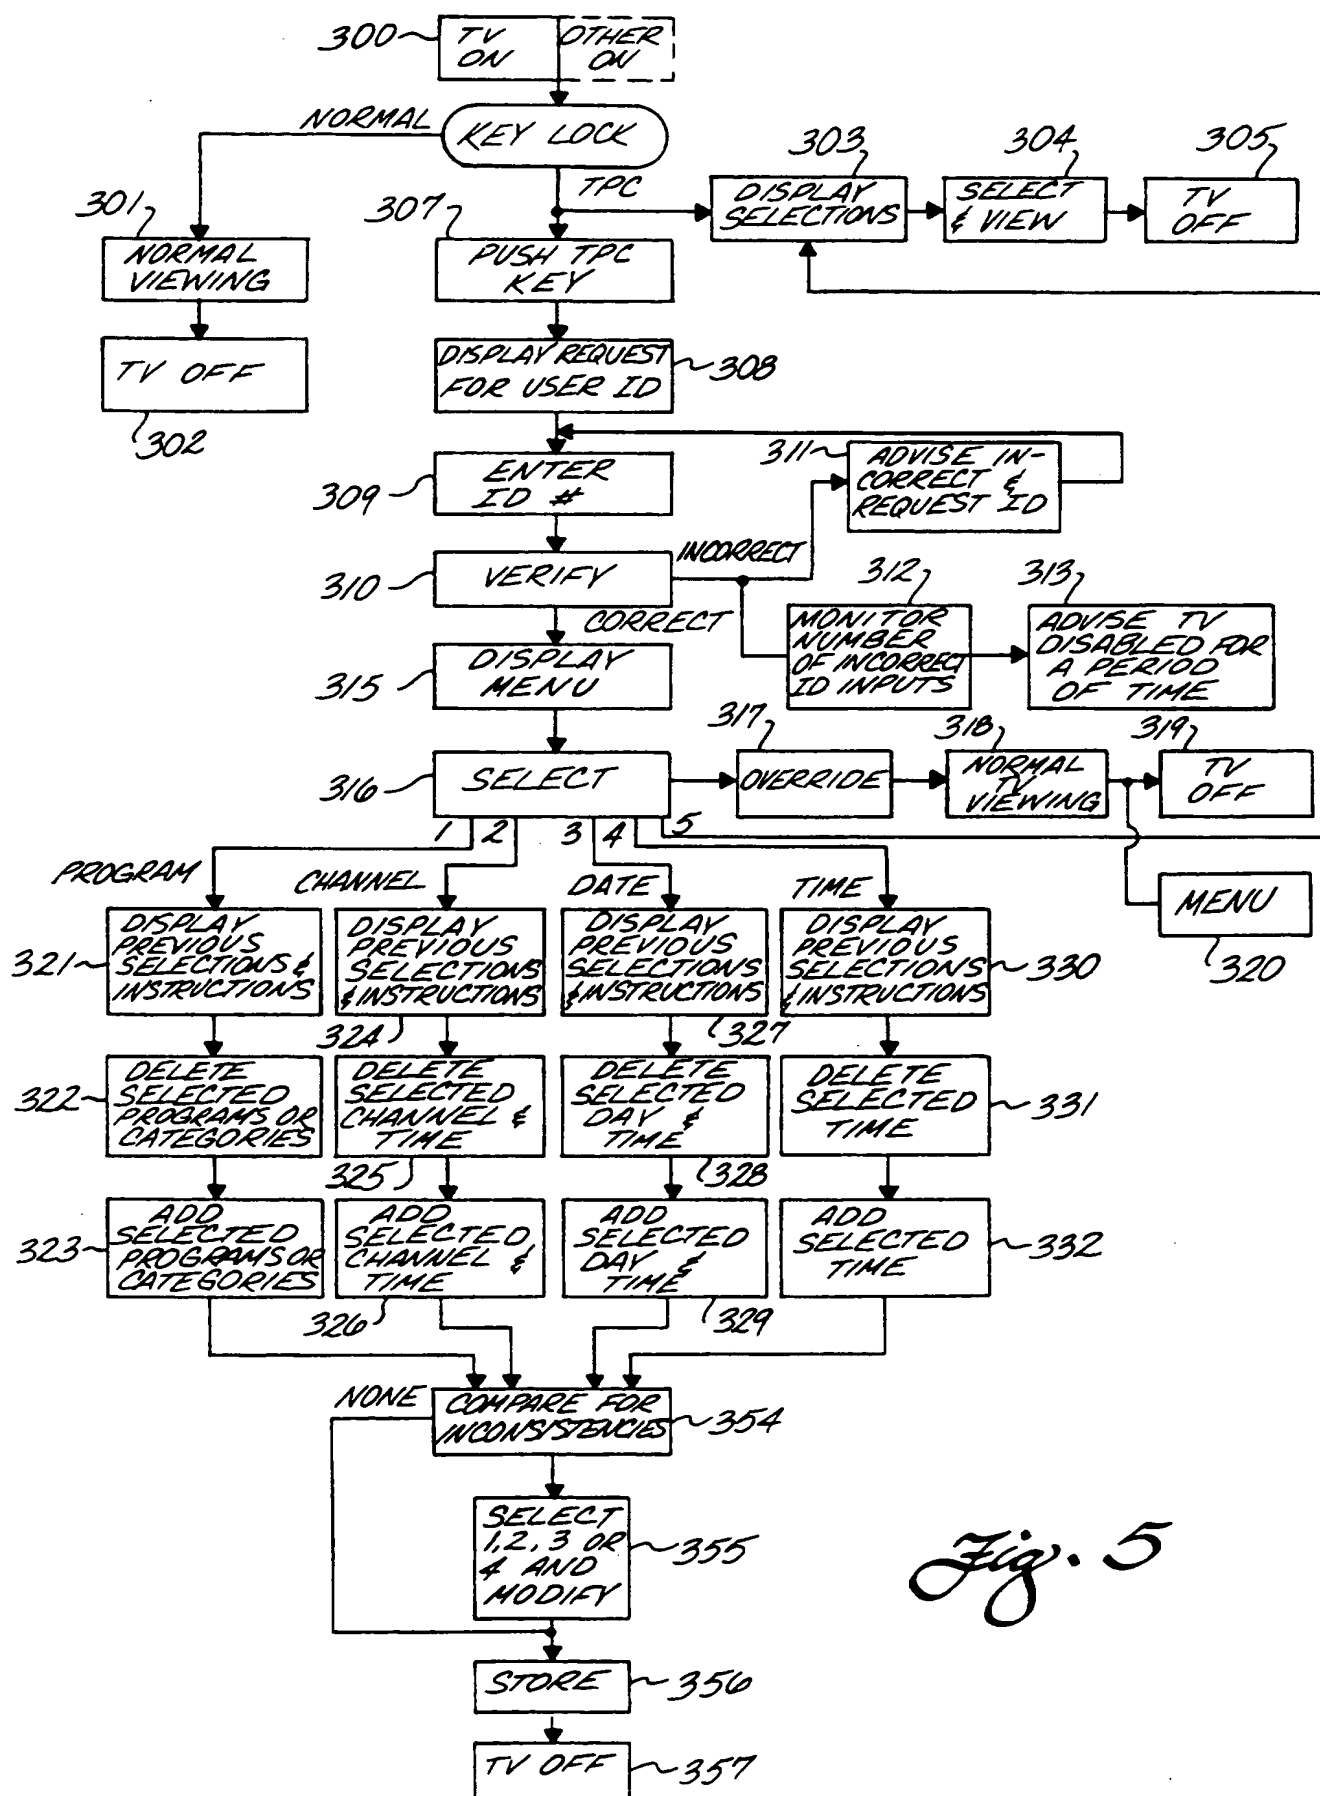


Fig. 5

6/17

*Fig. 6**PARENTAL CONTROL**THE FOLLOWING PROGRAMS ARE AVAILABLE FOR VIEWING.*

<i>4:30 PM - 5:00 PM</i>	<i>4</i>	<i>CARTOON EXPRESS (23561)</i>
<i>5:00 PM</i>	<i>11</i>	<i>L.A. LAKERS V. BOSTON CELTICS (0765)</i>
<i>6:30 PM - 7:00 PM</i>	<i>11</i>	<i>FAMILY TIES (15657)</i>
<i>7:00 PM - 7:30 PM</i>	<i>2</i>	<i>BEVERLY HILLBILLIES (49677)</i>

7/17

*Fig. 7*

*PARENTAL CONTROL*

*TO USE PARENTAL CONTROL FEATURE,  
ENTER YOUR IDENTIFICATION (ID) NUMBER.*

*Fig. 8*

*PARENTAL CONTROL*

*YOU HAVE ENTERED AN UNAUTHORIZED ID NUMBER  
PLEASE RE-ENTER YOUR ID NUMBER.*

9/17

*Fig. 9*

*PARENTAL CONTROL*


*THE ID NUMBERS ENTERED ARE NOT AUTHORIZED  
ID NUMBERS. THE TV WILL NOW BE DISABLED  
FOR A PERIOD OF TIME.*



10/17


*Fig. 10**PARENTAL CONTROL**POSSIBLE SELECTIONS**TO MAKE SELECTION - PUSH**1**1. PROGRAM**2**2. CHANNEL & TIME**3**3. DATE & TIME**4**4. TIME**5**5. REVIEW**6**6. TO OVERRIDE FOR NORMAL  
TV. VIEWING, PUSH**7**7. COMPARE FOR  
INCONSISTENCIES*

11/17

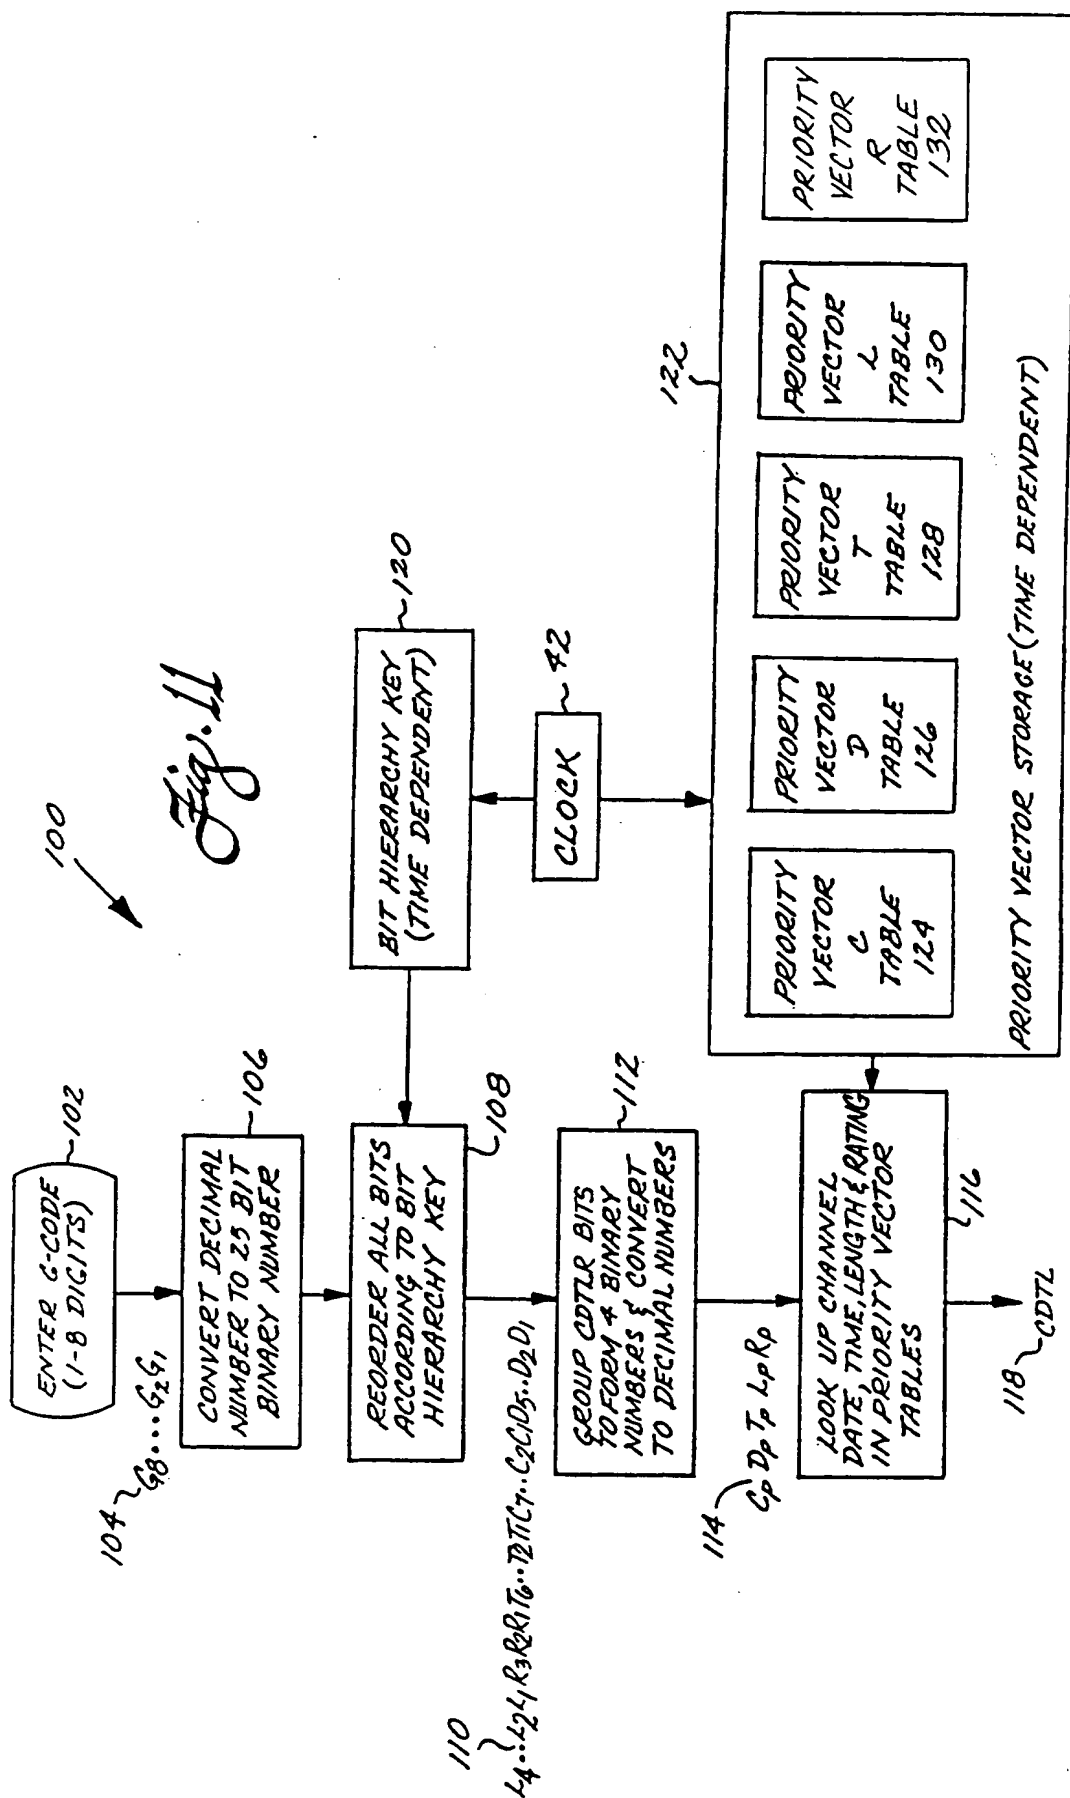


12/17

Fig. 12

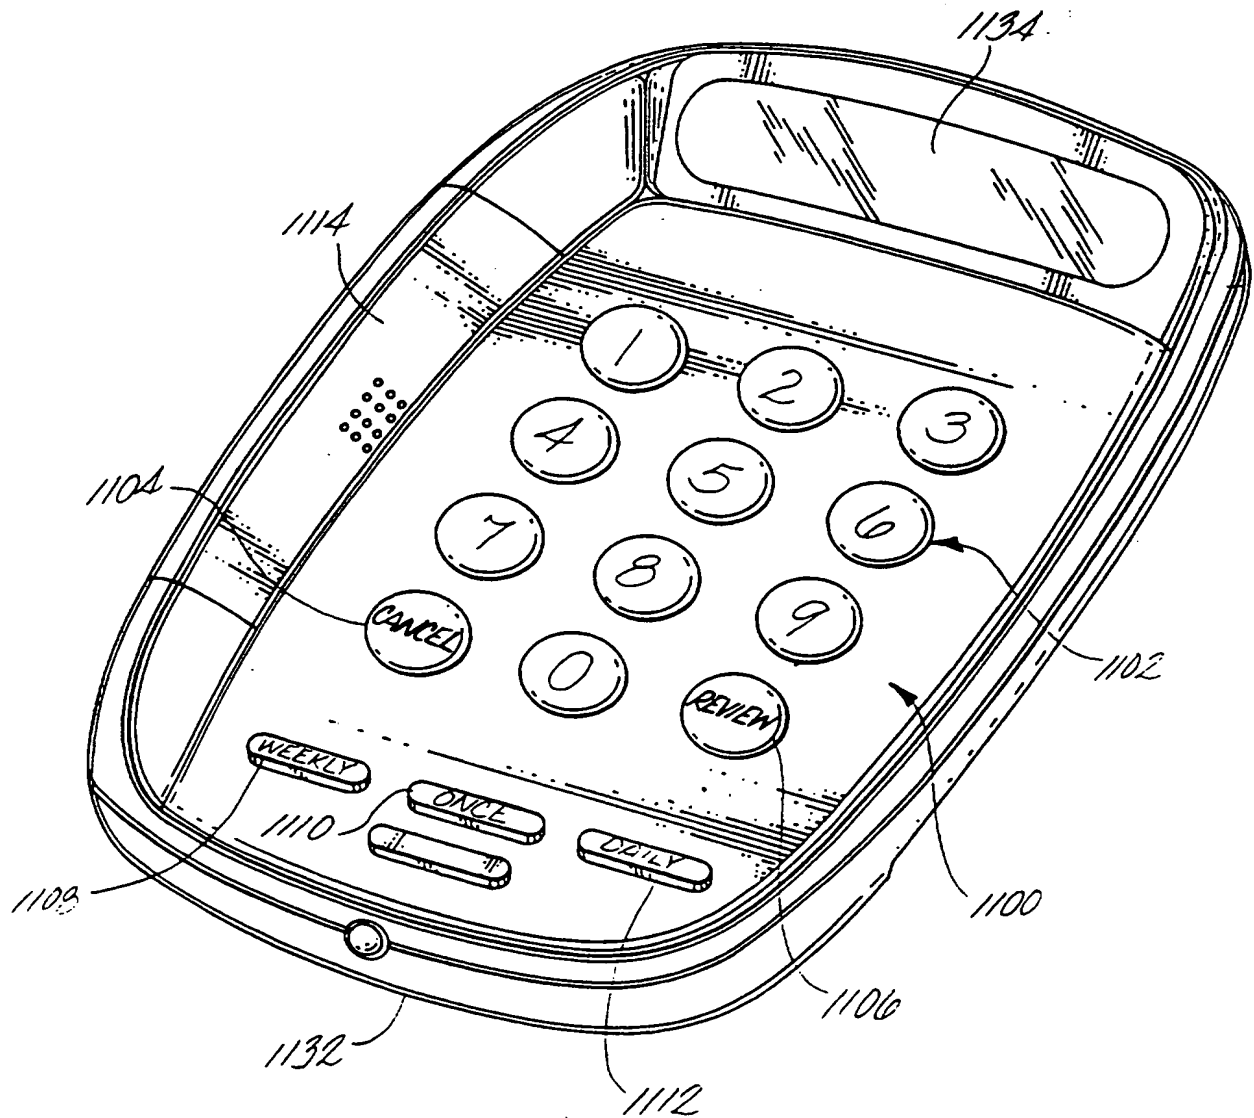

13/17

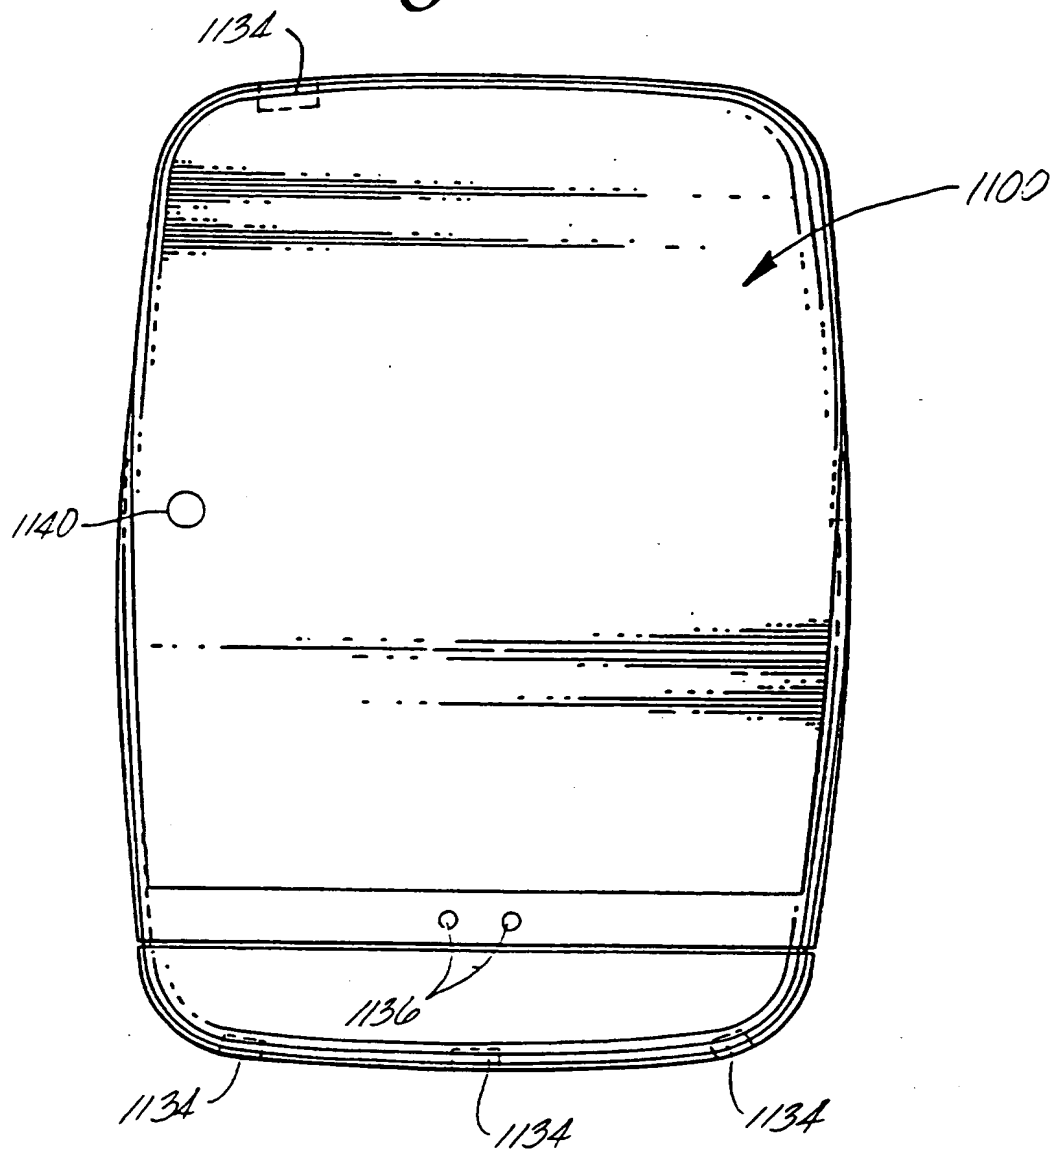*Fig. 13*

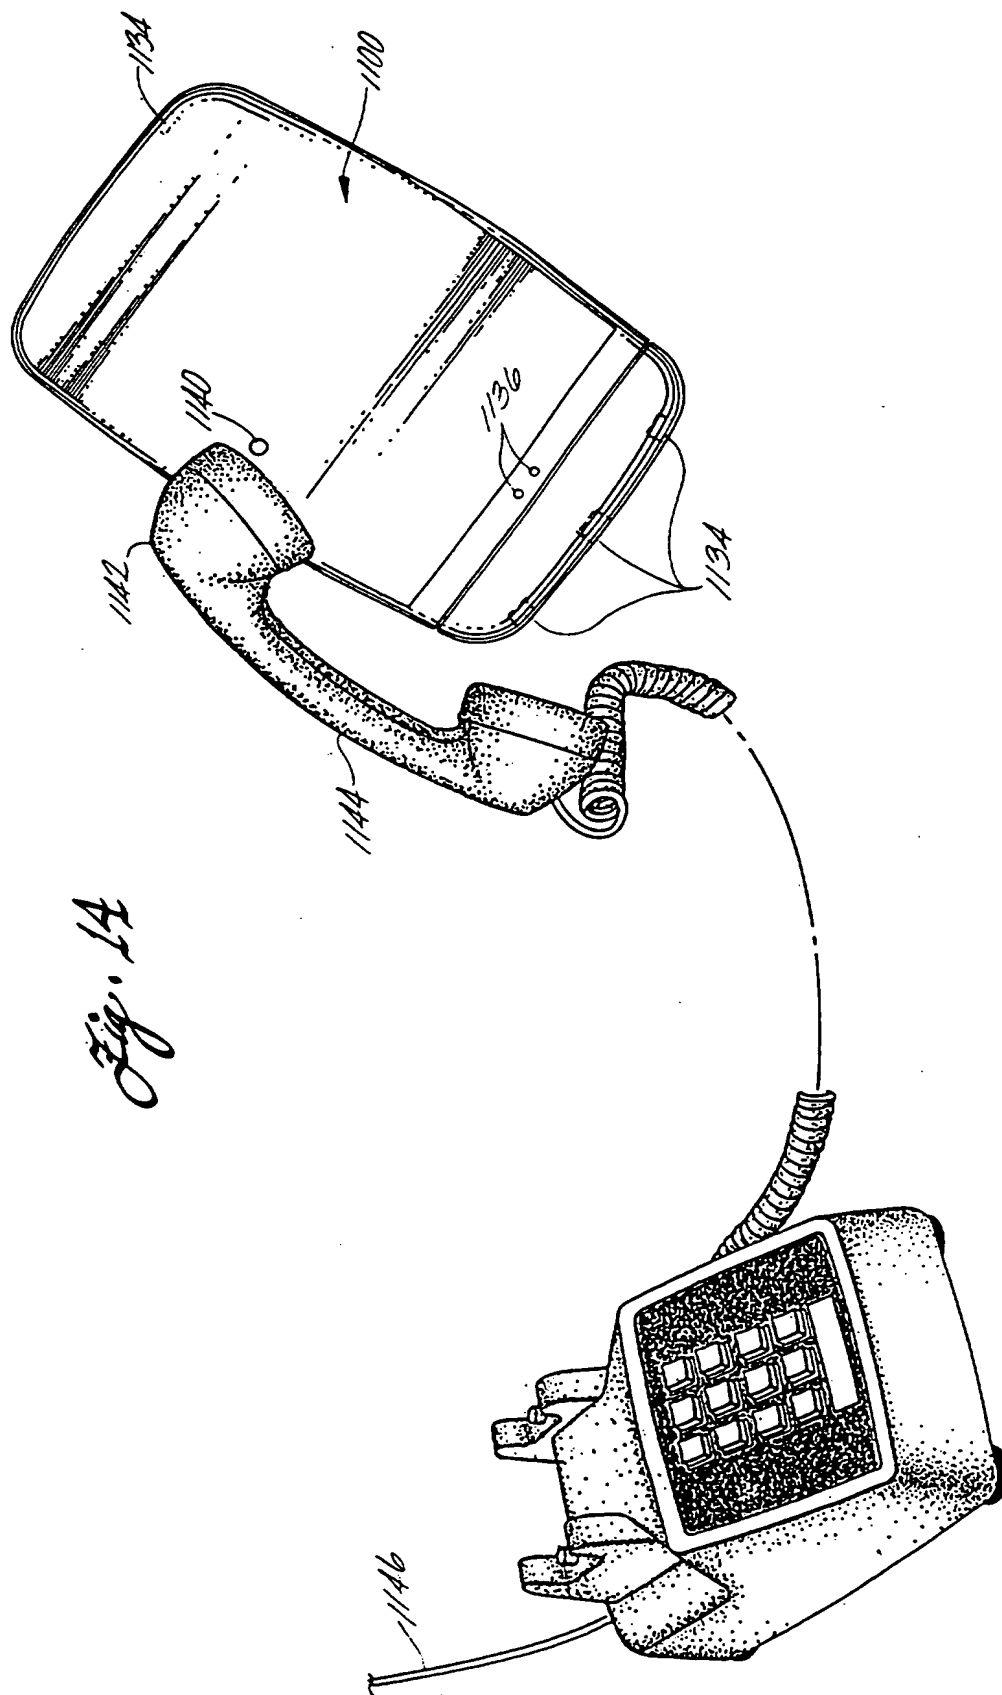


Fig. 15



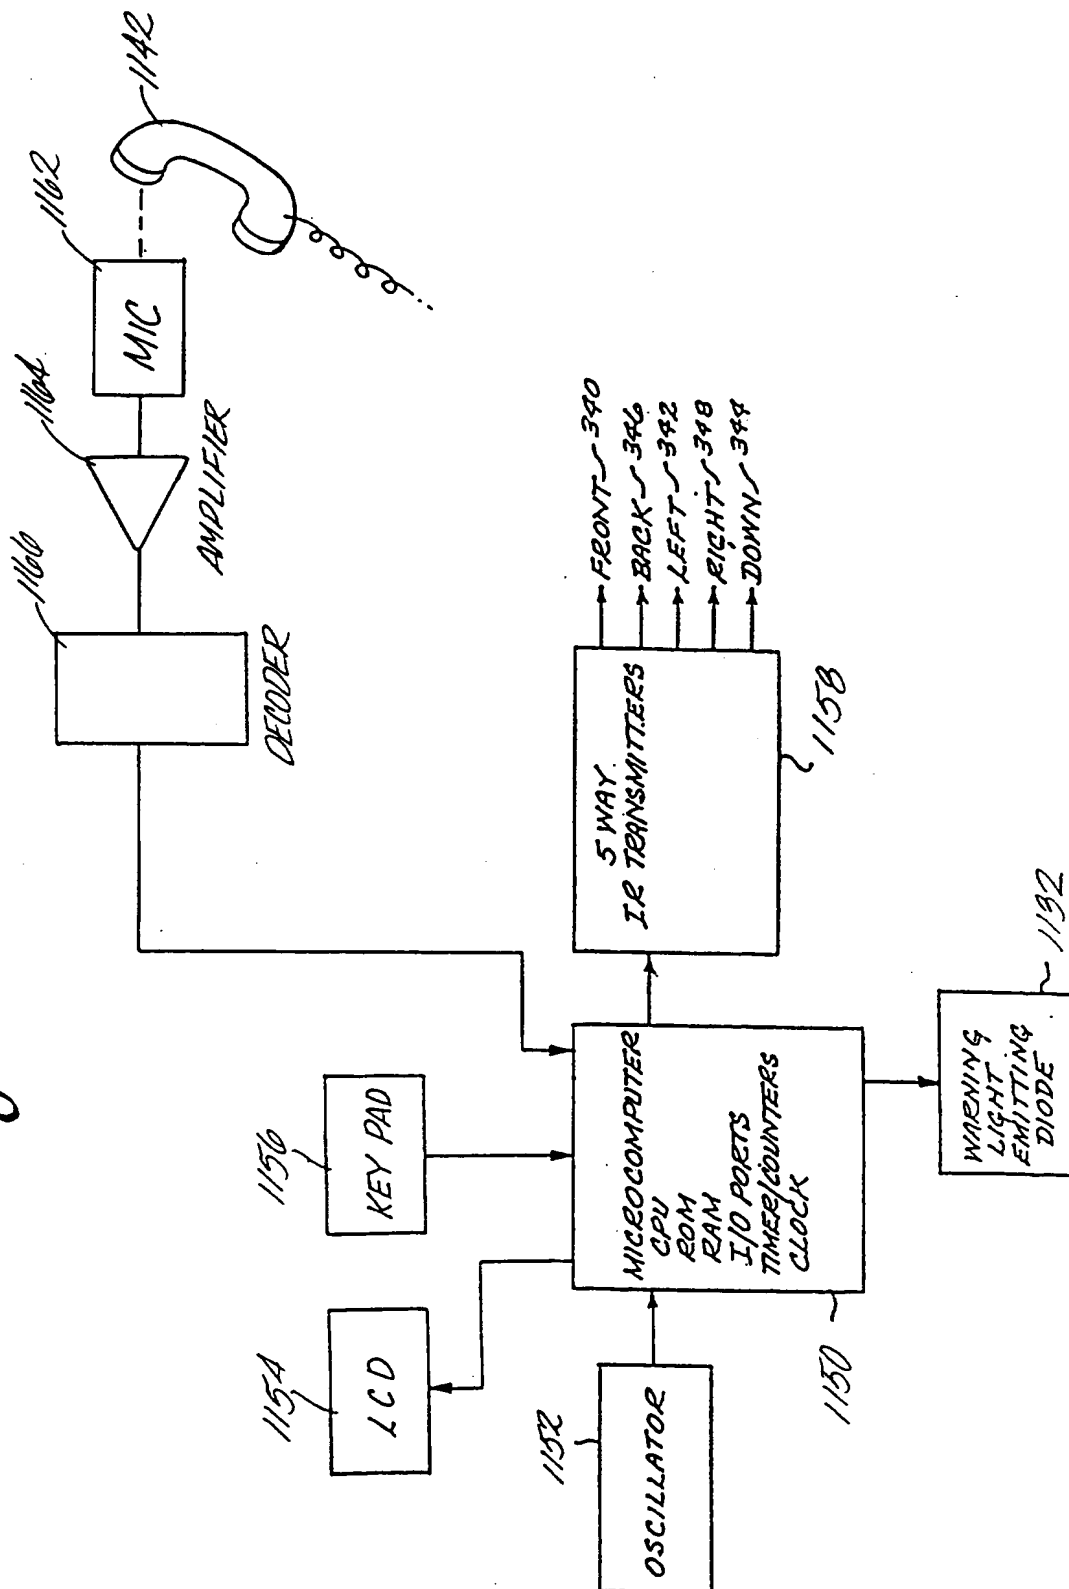


Fig. 16

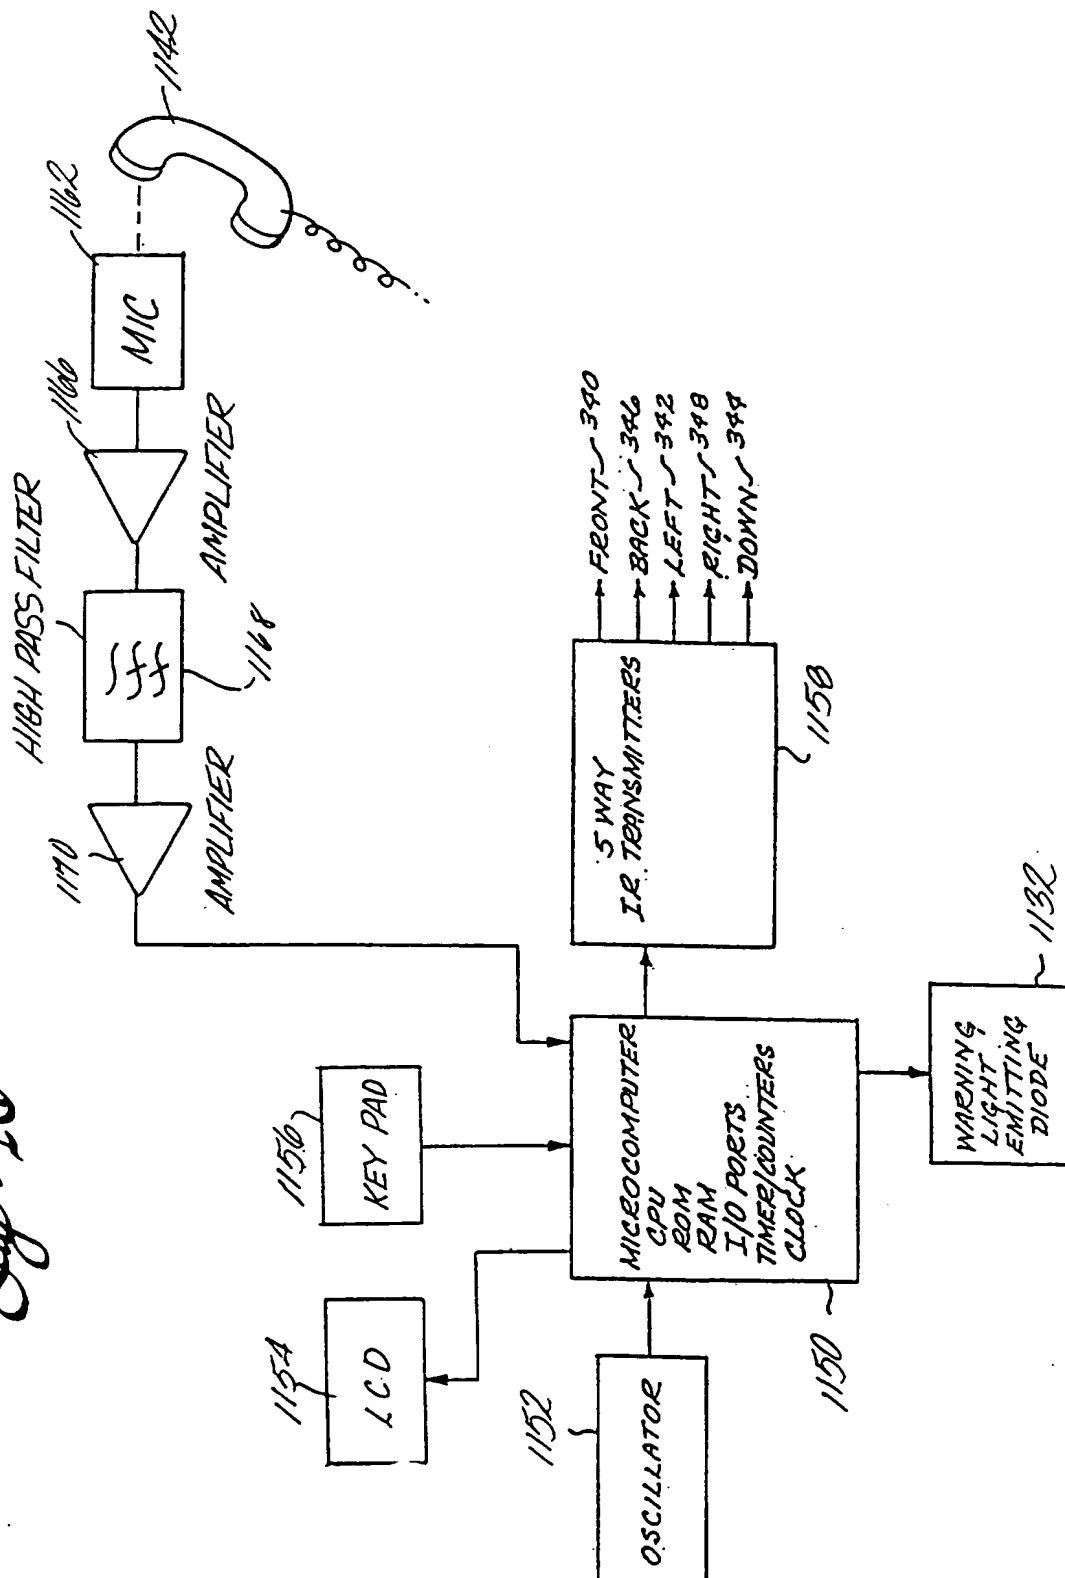

17/17

Fig. 17

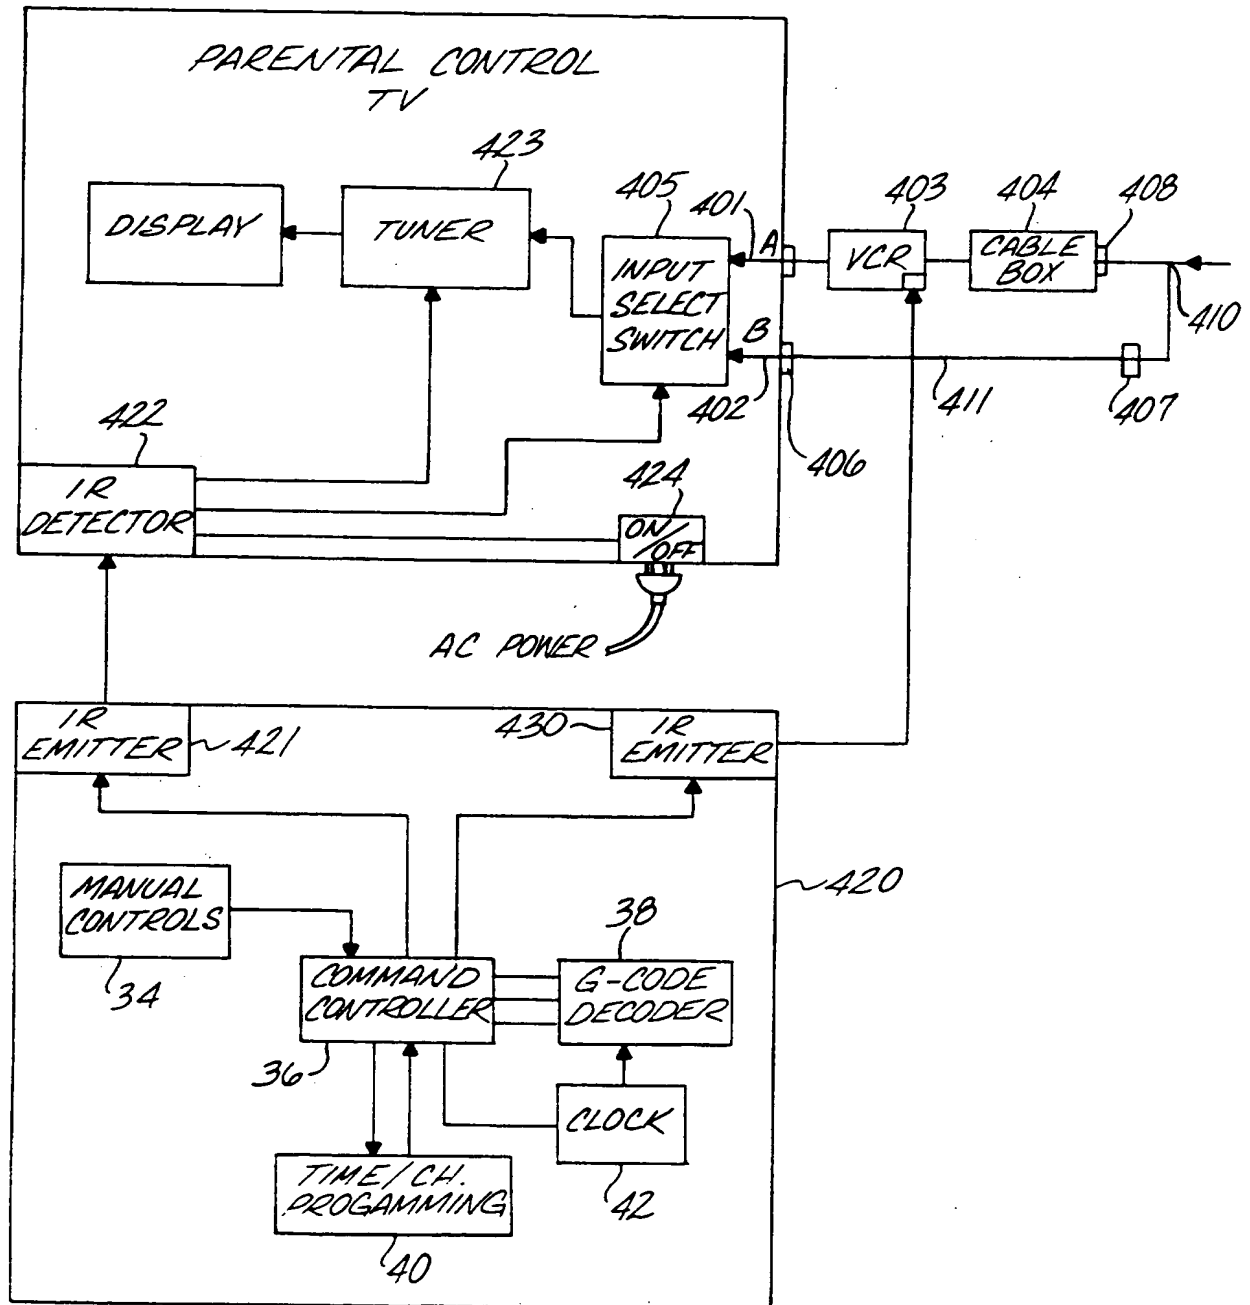



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US94/09656

## A. CLASSIFICATION OF SUBJECT MATTER

\*IPC(5) : H04N 5/44

US CL : 348/705, 5.5, 569, 716

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 348/705, 5.5, 569, 716, 725, 731, 734

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
NONE

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,488,179 (KRUGER et al) 11 December 1984, fig. 2.	16, 17
Y	US, A, 4,855,611 (ISOBE et al) 08 August 1989, figs. 1 & 7.	16, 17
Y	US, A, 5,253,066 (VOGEL) 12 October 1993, figs. 1 & 4 and col. 4, lines 65-67.	1, 6, 7
A	US, A, 4,425,579 (MERRELL) 10 January 1984, abstract and fig. 2.	1,3, 6-11, 13

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
* A* document defining the general state of the art which is not considered to be part of particular relevance	* X*	document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
* E* earlier document published on or after the international filing date	* Y*	document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
* L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* Z*	document member of the same patent family
* O* document referring to an oral disclosure, use, exhibition or other means		
* P* document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

29 OCTOBER 1994

Date of mailing of the international search report

17 JAN 1995

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer  
JEFFREY S. MURRELL

Telephone No. (703) 305-4700

Form PCT/ISA/210 (second sheet)(July 1992)\*

**THIS PAGE BLANK (USPTO)**